


## Smart Power Bank 8000 mAh Backup Battery

### INSTRUCTION MANUAL

Thank you for purchasing the RichardSolo Smart Power Bank. Please read this manual carefully before operation and save these instructions for future reference.

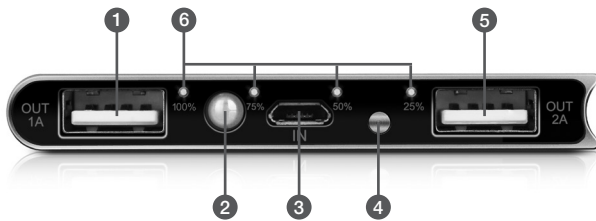

- 1 USB output port 1 (5V 1A)
- 2 LED flashlight
- 3 Micro-USB input port (5V 1.5A)
- 4 Power button
- 5 USB output port 2 (5V 2.1A)
- 6 4 LED charge capacity indicators (25%, 50%, 75%, 100%)

### Charge the Smart Power Bank:

Connect the included USB/micro-USB cable to charge the Smart Power Bank from the USB port on your computer or from a USB compatible wall charger. Each LED flashes in 25% increments and remains solid when its corresponding capacity\* has been reached. All LEDs remain solid when the unit is fully charged.

**\*Note:** LEDs may not provide an accurate reading while battery is recharging. For optimum performance, make sure all LEDs have stopped flashing and remain solid to ensure full charge capacity.

### Charge your device:

Connect the USB cable included with your device to either Port 1 or Port 2 and press the Smart Power Bank power button to begin charging. Please note to use Port 2 for iPad and other devices requiring a 2.1A connection. When no connection is detected for 30 seconds or when device is fully charged, the Smart Power Bank shuts off automatically.

### Check remaining charge capacity / Use LED flashlight:

Press power button once to check remaining charge capacity for your Smart Power Bank. 1 LED flashing = less than 25%; 1 LED solid = about 25%; 2 LEDs = about 50%; 3 LEDs = about 75%; 4 LEDs = about 75-100%.

Press power button twice to illuminate the built-in LED flashlight. Press twice again to switch off the LED.

### Specifications

Product name: Smart Power Bank  
Cell Type: Li-polymer battery  
Capacity: 8000 mAh  
Input: DC 5V 1.5A max  
Port 1 Output: DC 5V 1A  
Port 2 Output: DC 5V 2.

### USB Compatibility

**Port 1:** iPhone/iPod, smartphones, MP3 players

**Port 2:** iPad/tablets + iPhone/iPod, smartphones, MP3 players

### Maintenance

- 1) Do not store in a depleted state as the battery power cells can be damaged. Charge your Smart Power Bank at least once per month when not in use.
- 2) Keep the unit dry. Avoid damp conditions and corrosive materials.
- 3) Do not clean with harsh chemicals, soaps or detergents.

### Package Contents

- Smart Power Bank 8000 mAh Li-polymer battery
- USB/micro-USB charge cable
- User manual

### Safety Instructions

Read all instructions and warnings prior to using this product. Failure to read and follow these safety instructions could result in fire, explosion, electrical shock or other hazard causing serious and/or fatal injury and/or property damage.

- 1) Do not modify, disassemble, open, drop, crush, puncture or shred this product.
- 2) Do not expose this product to rain or water.
- 3) Keep away from open flame or sunlight to prevent heat build-up.
- 4) Keep away from high voltage devices.
- 5) This product is not a toy — keep away from children.